


Concept

REFRIGERATED DISPLAY CASE – GLASS ENDS – PRG

MODELS: PRG 5238, PRG 5258, PRG 5476

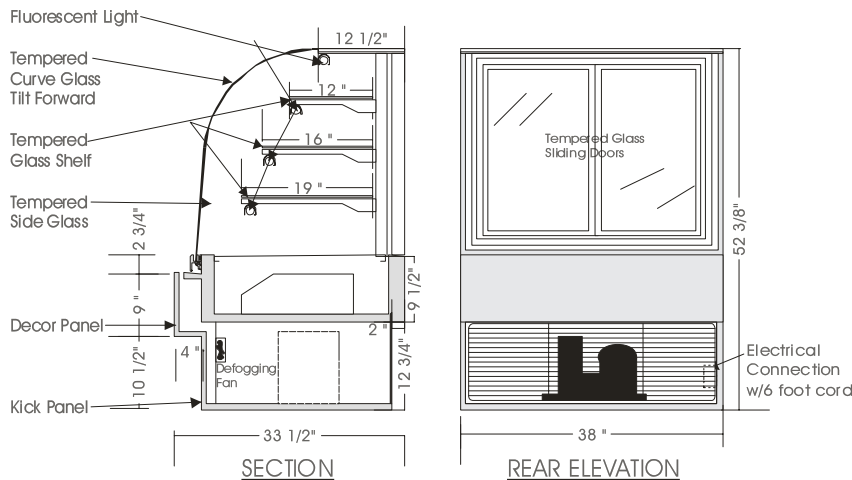

SPECIFICATIONS

MODEL	DIMENSIONS	COMPRESSOR	ELECTRICAL	SHIPPING WT.
PRG 5238	38"L.X33 1/2"D.X52 3/8"H.	1/3 H.P.	115V/1/60 HZ/10.0 AMP	415 lbs.
PRG 5258	58"L.X33 1/2"D.X52 3/8"H.	1/2 H.P.	115V/1/60 HZ/12.0 AMP	610 lbs.
PRG 5476**	76"L.X33 1/2"D.X54 3/8"H.	3/4 H.P.	115V/1/60 HZ/16.0 AMP	740 lbs

**** Height increased to 54 3/8" to accommodate condensing unit. 52 3/8" HT available with remote condensing unit only.**

STANDARD FEATURES

1. Top light and shelf lights.
2. Tempered curved front glass, tilt forward & removable.
3. White epoxy coated wire shelves.
4. Front glass defogging system.
5. Clear satin anodized aluminum hinge and framework.
6. Exterior & interior laminate finish: Black.
7. Self contained compressor w/hot gas condensate evaporator pan.

OPTIONS

1. Plastic laminate exterior finish of choice.
2. Powder coated or colour anodized hinge.
3. Custom units on request.
4. Remote condensing unit.
5. Mirrored sliding doors.
6. Tempered glass shelves.
7. Laminate covered side gables.

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity. Condensation may occur under hot & humid conditions.

Product entering the display case must be 4° Celsius (40°F.) or lower.

*Due to constant improvements, specifications are subject to change without notice.



Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6
 Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692
 email cds1@on.aibn.com
www.canadiandisplayystems.com