


Eurostyle Counter Top

DROP-IN REF. LOW PROFILE CASE – CTR-21

MODELS: CTR 2124, CTR 2136, CTR 2148, CTR 2160

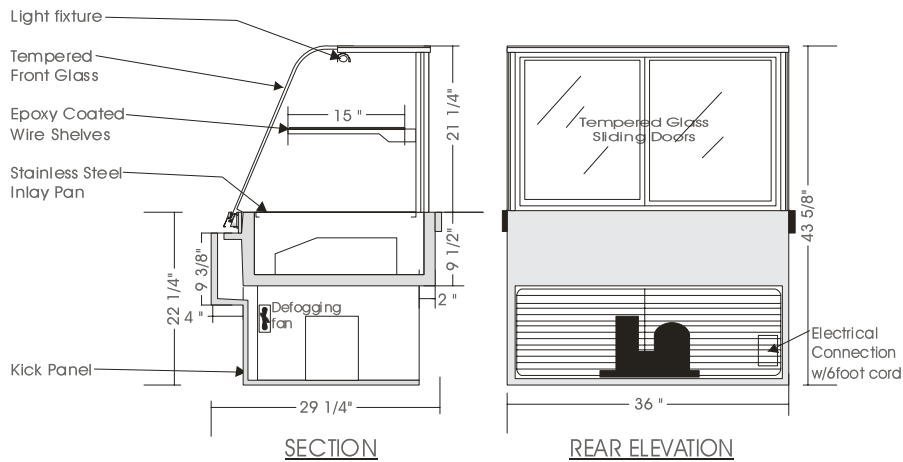

SPECIFICATIONS

| MODEL | DIMENSIONS | COMPR. | ELECTRICAL | SHIPPING WT. | CUTOUT SIZE |
|------------|---------------------------|----------|-----------------------|--------------|---------------------|
| CTR 2124** | 24"L.X27 1/2"D.X23 7/8"H. | 1/4 H.P. | 115V/1/60HZ/ 9.0 AMP. | 220 lb. | 24 1/4"L.X 24"D. |
| CTR 2136 | 36"L.X29 1/4"D.X23 7/8"H. | 1/3 H.P. | 115V/1/60HZ/ 9.0 AMP. | 270 lb. | 36 1/4"L.X28 3/4"D. |
| CTR 2148 | 48"L.X29 1/4"D.X23 7/8"H. | 1/3 H.P. | 115V/1/60HZ/10.0 AMP. | 320 lb. | 48 1/4"L.X28 3/4"D. |
| CTR 2160 | 60"L.X29 1/4"D.X23 7/8"H. | 1/3 H.P. | 115V/1/60HZ/11.0 AMP. | 450 lb. | 60 1/4"L.X28 3/4"D. |

NOTE: 23 7/8" HT. From counter top – 43 5/8" HT. From floor.

**** CALL FOR CTR 2124 DRAWING.**

(CTR 2124 Only) Front glass Defogging system not available. For air circulation cut out required at front of counter.

STANDARD FEATURES

1. Top light.
2. Tempered side glass, removable.
3. Tempered curved front glass, tilt forward and removable.
4. Clear satin anodized aluminum hinge and framework.
5. Self contained air cooled compressor w/hot gas condensate evaporator pan.
6. Exterior & interior laminate finish: Black.
7. Front glass defogging system for 38"L to 76"L. units.

OPTIONS

1. Additional shelf.
2. Tempered glass shelves.
3. Shelf lights w/electronic ballast.
4. Exterior plastic laminate finish of choice.
5. Powder coated or colour anodized hinge and framework.
6. Remote condensing unit.

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity.

Condensation on glass may occur under hot & humid conditions.

Product entering the display case must be 4° Celsius (40°F.) or lower.

*Due to constant improvements, specifications are subject to change without notice.



Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6
Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692

email cds1@on.aibn.com

www.canadiandisplayssystem.com